


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478V-C5

rev20240510

### LINE DRAWING



### FEATURES

|                                     |                                                                                                                                                                                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Energy Metering                     | Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Energy (kWh), Power Factor                                                                                                                                |
| Metering Accuracy                   | ISO/IEC 62053-21 1% (see page 3 for details)                                                                                                                                                                             |
| Metering per Input Line             | Yes                                                                                                                                                                                                                      |
| Metering per Branch Circuit Breaker | Yes                                                                                                                                                                                                                      |
| Metering per Output Receptacle      | Yes                                                                                                                                                                                                                      |
| Remote Outlet Switching             | Yes                                                                                                                                                                                                                      |
| Environmental Sensor Ready          | Yes                                                                                                                                                                                                                      |
| Replaceable Controller              | Yes                                                                                                                                                                                                                      |
| Compatible Sensors                  | Temperature, Humidity, Air Flow, Differential Pressure, Water Leak, and Contact Closure                                                                                                                                  |
| Networking                          | Gigabit (10/100/1000 BaseT) Ethernet port; secondary, redundant (10/100/1000 BaseT) Ethernet port. Optional WiFi (802.11a/b/g/n)                                                                                         |
| Remote Management                   | HTTP(s); SSH; Telnet; RS-232 (Serial); Power IQ; SNMP version v2/v3; SMTP; JSON-RPC; Modbus over TCP                                                                                                                     |
| Cascading                           | Yes, Max 16 PDUs can be daisy chained using a USB connection and 32 PDUs using Ethernet connection                                                                                                                       |
| Onboard Display                     | Color, matrix LCD display : Voltage, current, or active power (per line, per breaker, or per receptacle / outlet); Alarms; Configuration information (name, ratings, IP / Networking information); Auto-flip orientation |
| Embedded Processor                  | ARM Cortex A5 536MHZ (Atmel A5D35A), 16MB SPI Flash, 64MB DDR2 RAM                                                                                                                                                       |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478V-C5

rev20240510

### INPUT

|                       |                                |
|-----------------------|--------------------------------|
| Input Plug            | NEMA L5-30P (2P3W)             |
| Cord Length           | 3 meters (9.84 feet) standard  |
| Cord Entry            | Bottom-bottom feed             |
| Cable Type            | IP44("splashproof")            |
| Number of Power Cords | 1                              |
| Maximum Input Current | 30A                            |
| Nominal Input Voltage | 120V                           |
| Rated Input Voltage   | 100 - 120V                     |
| Input Frequency       | 50/60Hz                        |
| Power Capacity        | 2.4kVA at 100V, 2.9kVA at 120V |

### OUTPUT

|                                  |                      |
|----------------------------------|----------------------|
| Nominal Output Voltage           | 120V                 |
| Rated Output Voltage             | 100 - 120V           |
| Receptacles (Output Connections) | (24) NEMA 5-20R, 16A |
| Securelock Support               | No                   |
| Cord Retention                   | Yes                  |
| Overload Protection              | (2) Airpax LELBX1-20 |

### PHYSICAL

|                             |                                                  |
|-----------------------------|--------------------------------------------------|
| Color                       | Black powder coat (custom colors available)      |
| Unit Dimensions (WxDxH)     | 2.1" x 2.6" x 60.6" ; 52mm x 65mm x 1539mm       |
| Unit Weight                 | 5.1 kg                                           |
| Shipping Weight             | 7.6 kg                                           |
| Shipping Dimensions (WxDxH) | 11.02" x 4.53" x 71.46" ; 280mm x 115mm x 1815mm |
| Mounting                    | G2-RACK-FOR-ZU                                   |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478V-C5

rev20240510

### ENVIRONMENTAL

|                             |           |
|-----------------------------|-----------|
| Operating Temperature       | 60°C      |
| Operating Relative Humidity | 85%       |
| Operating Elevation         | 0-10000ft |

### CONFORMANCE

|                      |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| Regulatory Approvals | UL Listed, Canada ICES-003, Part 15 Class A of the FCC rules, RoHS compliant |
| Warranty             | Standard 2 years manufacturer warranty                                       |

### ACCURACY

|                   | Input Measurement         | Output Measurement        |
|-------------------|---------------------------|---------------------------|
| LCD & GUI Current | ±1% at 0.1 A resolution   | ±1% at 0.1 A resolution   |
| Voltage           | ±1% at 0.1 V resolution   | ±1% at 0.1 V resolution   |
| Active Power      | ±1% at 1 W resolution     | ±1% at 1 W resolution     |
| Apparent Power    | ±1% at 1 VA resolution    | ±1% at 1 VA resolution    |
| Power Factor      | ±1% at 0.1 resolution     | ±1% at 0.1 resolution     |
| Active Energy     | ±1% at 0.1 kWh resolution | ±1% at 0.1 kWh resolution |

### Branch Measurement


|         |                         |
|---------|-------------------------|
| Current | ±1% at 0.1 A resolution |
|---------|-------------------------|

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478V-C5

rev20240510

### CONTROL PANEL

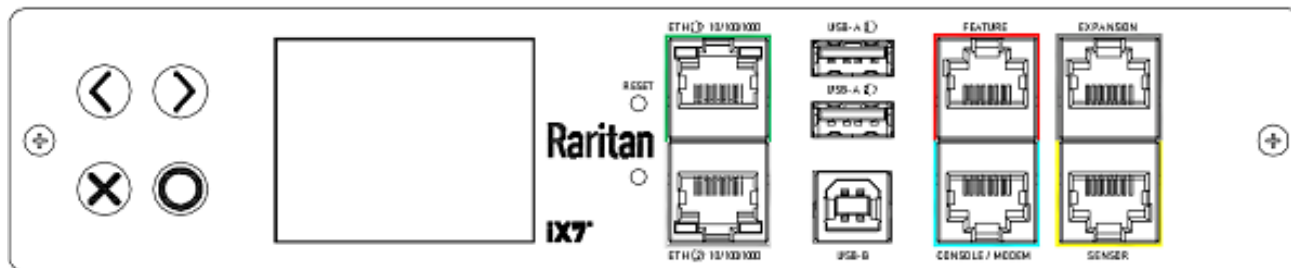


**Technical Specifications / Engineering Submittals**

Raritan Model Number: PX3-5478V-C5

rev20240510

**ELECTRICAL (ONE LINE) DIAGRAM**

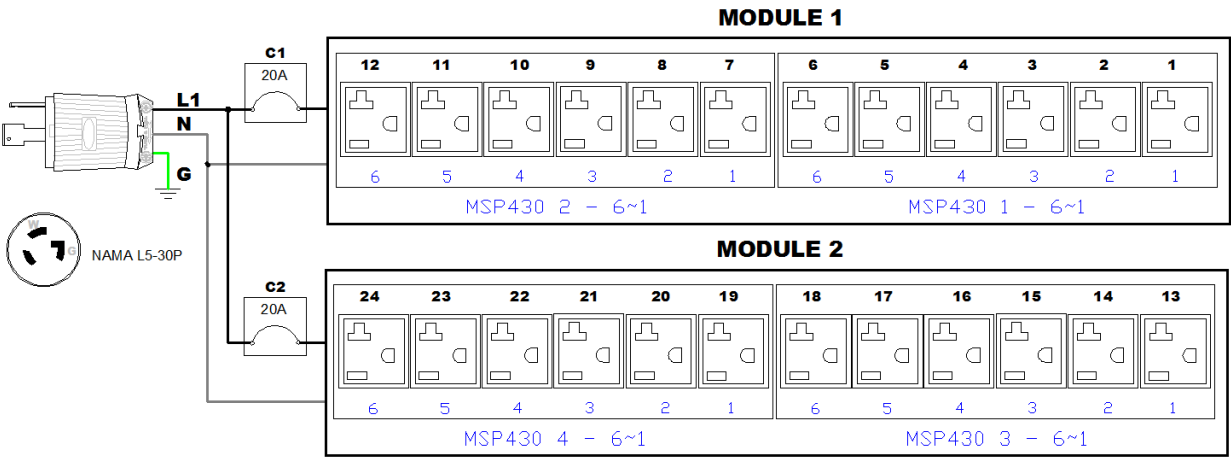


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478V-C5

rev20240510

### MECHANICAL DIAGRAM

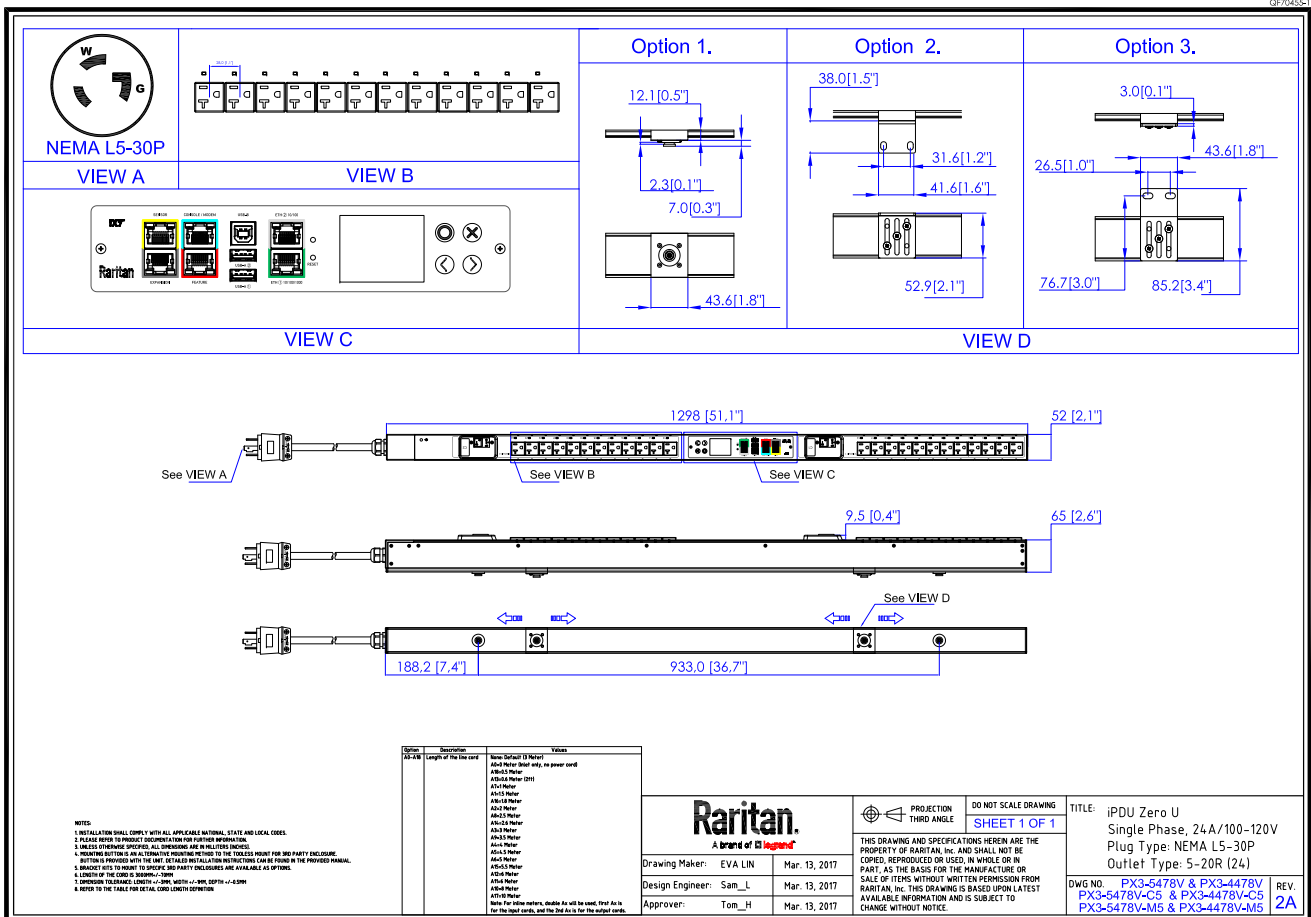



## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478V-C5


rev20240510

### Mounting Diagram (G2-RACK-FOR-ZU)



**250-70-0104-00**






250-80-0011-00

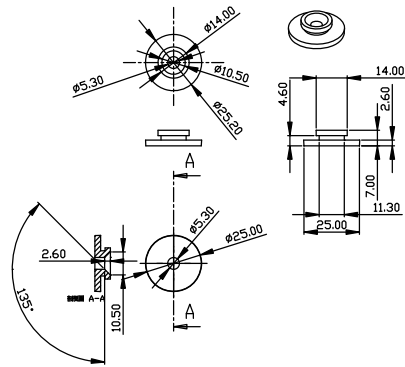

**250-70-0007-00**

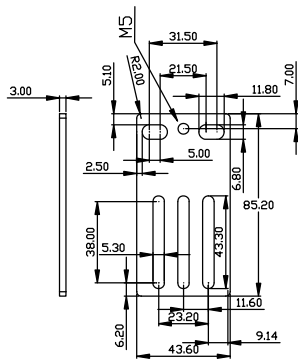


**250-70-0093-00**

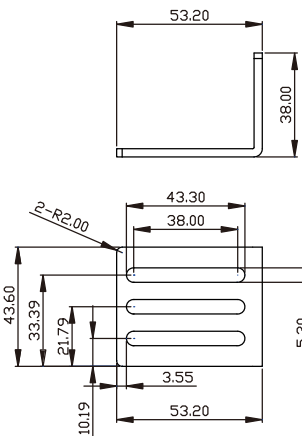

**Technical Specifications / Engineering Submittals**  
Raritan Model Number: PX3-5478V-C5

rev20240510

**TRIP CURVE**

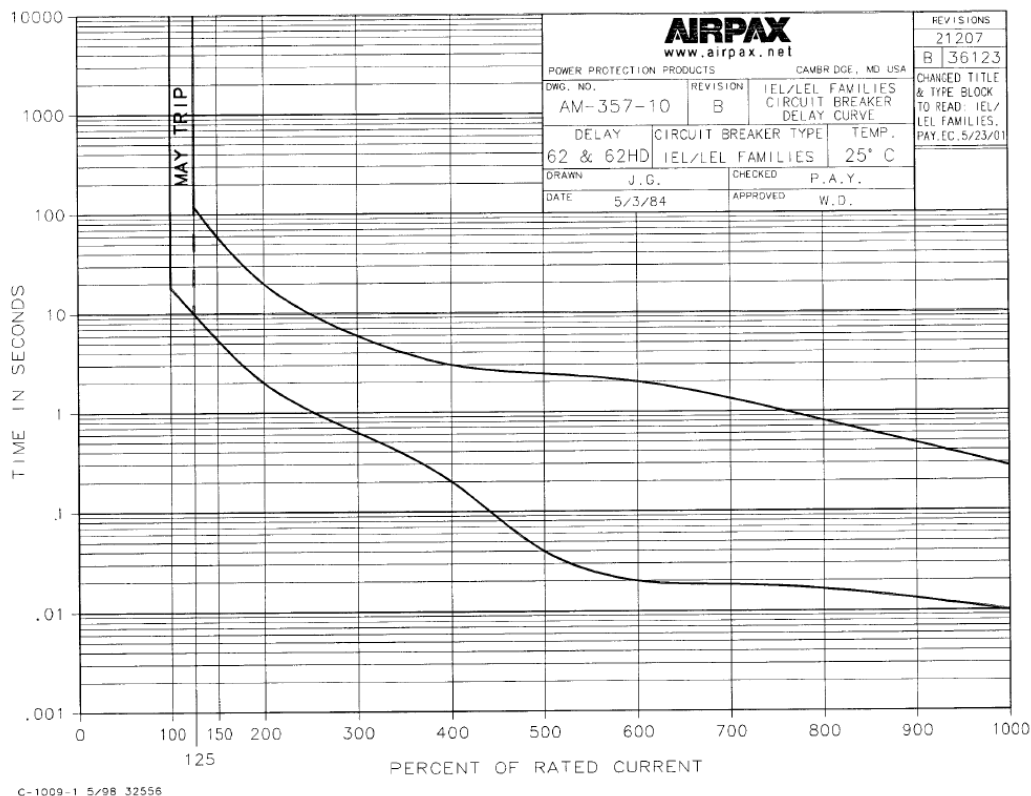

This file generated on: Fri, May 10, 2024 - 08:23:25