


Overview

HPE ProLiant DL325 Gen10 Plus v2 server

The HPE ProLiant DL325 Gen10 Plus v2 is a secure and versatile single socket server for virtualization, I/O intensive and storage intensive workloads.

Powered by the 3rd generation AMD® EPYC® 7003 Series processor, the HPE ProLiant DL325 Gen10 Plus v2 offers greater processing power. On top of that, the chassis is smaller compared to the previous generation providing better compatibility to your infrastructure. Tri-Mode RAID controller support provides flexibility to support across SAS/SATA/NVMe types of storage options.

This 1P, 1U server delivers an exceptional balance of processor, memory and I/O for 2P performance at 1P TCO. Get the most out of your virtualized environment with this versatile server.

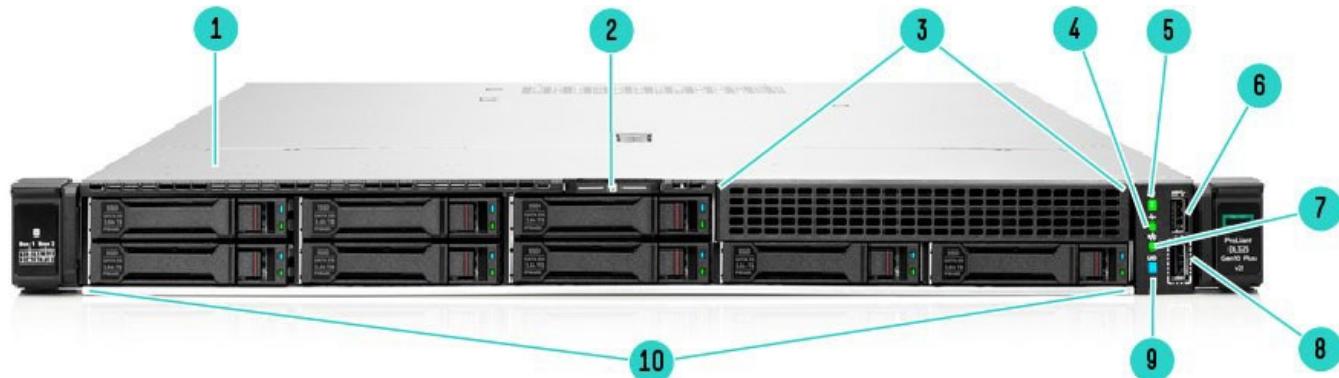


8SFF Front View

1. Quick removal access panel	6. USB 3.1 Gen1 port
2. Serial no. label pull tab	7. NIC status LED
3. Optional Media Bay*	8. iLO Service Port
4. Health LED	9. UID button/LED
5. Power On/Standby button and system power LED	10. Standard 8 SAS/SATA/NVMe Hot Plug drive bays

Notes:

- * Option Shown: No media
- * Optional: +2SFF U.3 SAS/SATA/NVMe drives (total max 10SFF)
- * Optional: +2SFF U.2 NVMe drives (total max 10SFF)
- * Optional: 9.5 mm SATA DVD-ROM/RW Optical Drive

Overview

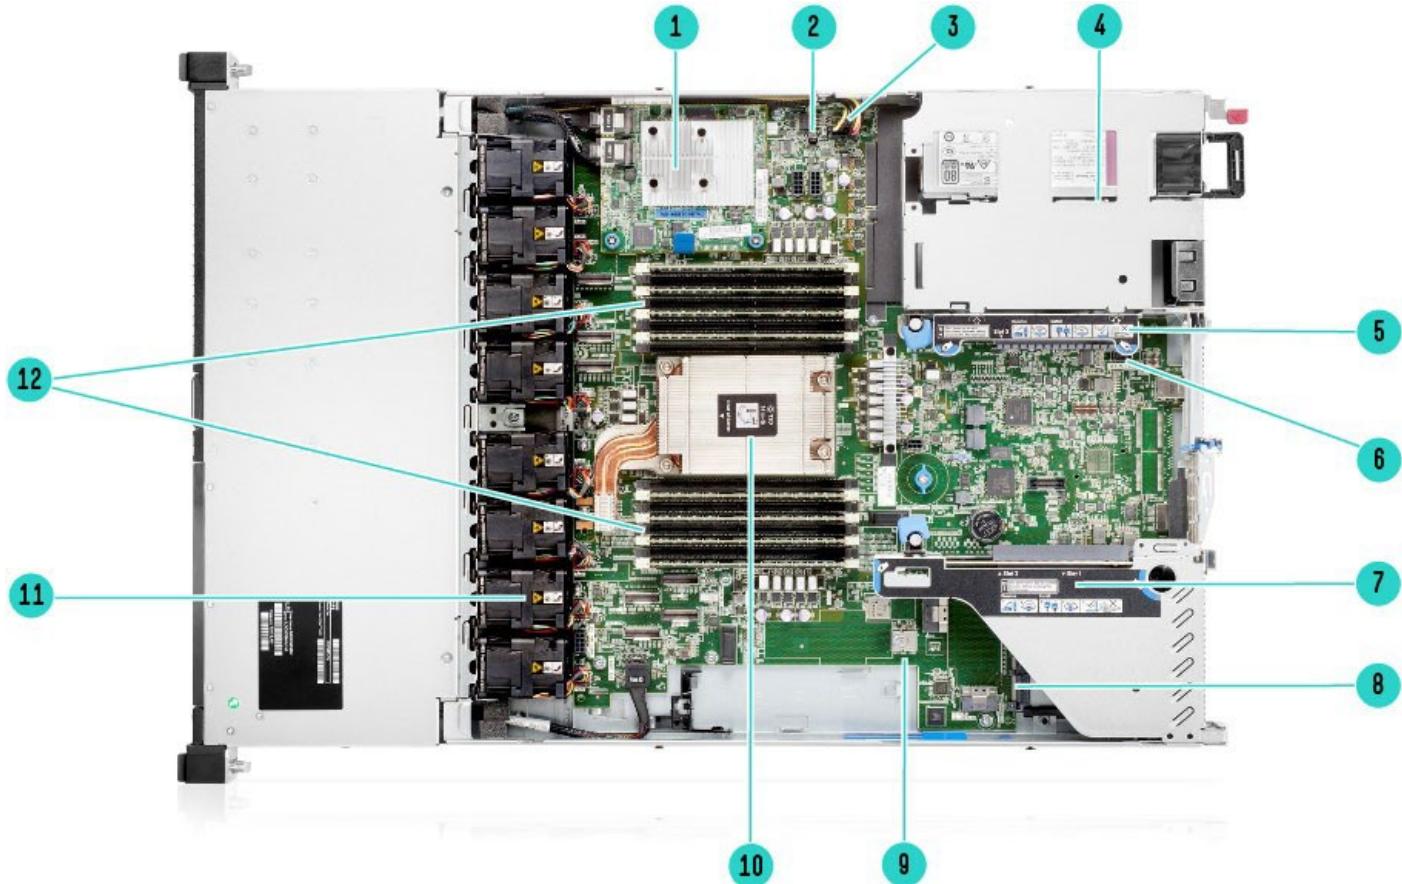


Internal View 8SFF chassis

1. Optional HPE Flexible Smart Array Controller (Type -a shown)	7. Primary PCIe riser, standard (Under) OCP 3.0 Slot
2. Chassis intrusion detection connector	8. Internal USB 3.1 Gen1 connector
3. Hard drive backplane power connector	9. Processor (heatsinks shown)
4. Hot Plug redundant HPE Flexible Slot Power supplies	10. Fan cage shown with 8 Performance Hot-swappable fans
5. Connection for (optional) secondary riser	11. DDR4 DIMM slots. Only 8 slots are populated as shown.
6. Serial Port Connector	



Overview

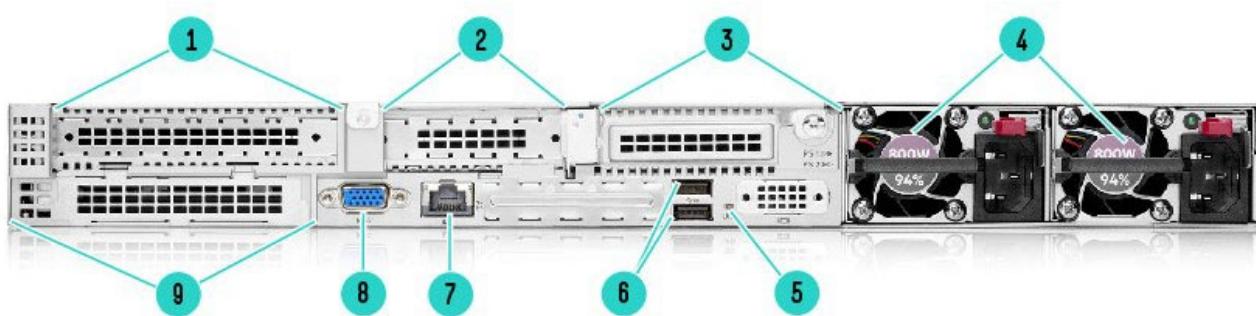

Rear View

1. Slot 1 PCIe 4.0	6. USB 3.1 Gen1 Ports (2)
2. Slot 2 PCIe 4.0	7. iLO Management Port
3. Optional Slot 3 PCIe 4.0	8. VGA port
4. Hot-plug Power Supply 1 and 2 (Optional)	9. Optional: OCP 3.0 Slot (not shown)
5. UID LED	

What's New

- Supports the latest AMD EPYC 7003 Series processor with up to 280W
- Chassis is less than 1 meter of depth
- Support for Tri-Mode storage controllers for SAS/SATA/NVMe drives
- New Basic Carrier SAS/SATA/NVMe drives.
- Support for up to 10 SFF/4 LFF drives
- European Union (EU) Lot 9 regulation, please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> for more information.

Platform Information

Form Factor

- 1U rack

Chassis Types

- 4 LFF SAS/SATA, with optional Optical Drive options
- 8 SFF SAS/SATA, with optional 2SFF SAS/SATA or 2 NVMe and Optical Drive options
- 8 SFF NVMe U.2/U.3, with optional 2SFF SAS/SATA or 2 NVMe and Optical Drive options

Notes:

- Mixing LFF & SFF is not supported
- When a 8 SFF chassis is selected, minimum one 8 SFF SAS/SATA, 8 SFF NVMe U.3 or 8 SFF NVMe U.2 backplane kit must be selected
- When a 4 LFF chassis is selected, one 4 LFF SAS/SATA backplane kit must be selected
- The 8 SFF can be upgraded with either an additional 2 SFF drive kit for a total 10 SAS/SATA drives or 2SFF NVMe Kit for a total of 8 SAS/SATA + 2 NVMe drives or an optional Optical Drive
- The 8 SFF NVMe chassis can be upgraded with either an additional 2SFF NVMe kit for a total of 10 NVMe drives or 2SFF drive kit for a total of 8NVMe + 2 SAS/SATA drives or an optional Optical Drive

System Fans

- Standard Fan Kit and Maximum Performance Fan Kit are not included in the chassis



Standard Features

Processors – One of the following depending on model.

Notes: For more information regarding AMD EPYC processors, please see the following:

<https://www.amd.com/en/products/processors/server/epyc.html>

AMD EPYC Processor	Cores	Base Frequency	Max Frequency	Max Memory	Wattage	Cache	Memory
EPYC 7763	64	2.45 GHz	3.5 GHz	4TB	280W	256MB	3200MT/s
EPYC 7713P	64	2.0 GHz	3.675 GHz	4TB	225W	256MB	3200MT/s
EPYC 7663	56	2.0 GHz	3.5 GHz	4TB	240W	256MB	3200MT/s
EPYC 7643	48	2.3 GHz	3.6 GHz	4TB	225W	256MB	3200MT/s
EPYC 7543P	32	2.8 GHz	3.7 GHz	4TB	225W	256MB	3200MT/s
EPYC 7513	32	2.6 GHz	3.65 GHz	4TB	200W	128MB	3200MT/s
EPYC 7453	28	2.75 GHz	3.45 GHz	4TB	225W	64MB	3200MT/s
EPYC 7443P	24	2.85 GHz	4.0 GHz	4TB	200W	128MB	3200MT/s
EPYC 7413	24	2.65 GHz	3.6 GHz	4TB	180W	128MB	3200MT/s
EPYC 7343	16	3.2 GHz	3.9 GHz	4TB	190W	128MB	3200MT/s
EPYC 7313P	16	3.0 GHz	3.7 GHz	4TB	155W	128MB	3200MT/s
EPYC 75F3	32	2.95 GHz	4.0 GHz	4TB	280W	256MB	3200MT/s
EPYC 74F3	24	3.2 GHz	4.0 GHz	4TB	240W	256MB	3200MT/s
EPYC 73F3	16	3.5 GHz	4.0 GHz	4TB	240W	256MB	3200MT/s
EPYC 72F3	8	3.7 GHz	4.1 GHz	4TB	180W	256MB	3200MT/s
EPYC 7773X	64	2.2 GHz	3.5 GHz	4TB	280W	768MB	3200MT/S
EPYC 7573X	32	2.8 GHz	3.6 GHz	4TB	280W	768MB	3200MT/S
EPYC 7473X	24	2.8 GHz	3.7 GHz	4TB	240W	768MB	3200MT/S
EPYC 7373X	16	3.1 GHz	3.8 GHz	4TB	240W	768MB	3200MT/S
EPYC 7232P	8	3.1 GHz	3.2 GHz	4TB	120W	32MB	3200MT/s
EPYC 7302P	16	3.0GHz	3.3GHz	4TB	155W	128MB	3200MT/s
EPYC 7402P	24	2.8GHz	3.35GHz	4TB	180W	128MB	3200MT/s
EPYC 7203P	8	2.8GHz	3.4GHz	4TB	120W	64MB	3200MT/s
EPYC 7303P	16	2.4GHz	3.4GHz	4TB	130W	64MB	3200MT/s
EPYC 7643P	48	2.3GHz	3.6 GHz	4TB	225W	256MB	3200MT/s
EPYC 7663P	56	2.0GHz	3.5 GHz	4TB	240W	256MB	3200MT/s

Notes:

- All AMD EPYC processors can support up to 4TB of memory each.
- 7xx2 processors can't support 2 DIMM per channel @3200MT/s but 2DPC @2933MT/s.

Chipset

No chipset – System on Chip (SoC) design.

On System Management Chipset

HPE iLO 5 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).



Standard Features

Memory

One of the following depending on model

Type:	HPE DDR4 Smart Memory	Registered (RDIMM), Load Reduced (LRDIMM)
DIMM Slots Available	16	16 DIMM slots per processor, 8 channels per processor, 2 DIMMs per channel
Maximum capacity (RDIMM)	1.0 TB	16 x 64 GB RDIMM @ 3200 MT/S at 1 or 2 DPC
Maximum capacity (LRDIMM)	4.0 TB	16 x 256 GB LRDIMM @ 3200 MT/s at 1 DPC, 2933 MT/s at 2 DPC

Notes: The maximum memory speed is dependent on the DIMM selection.

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Expansion Slots

Default Primary Riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 4.0	X16	X16	Full-height, Full-length slot	Proc 1
2	PCIe 4.0	X16	X16	Low Profile	Proc 1

Notes: Bus Width Indicates the number of electrical lanes running to the connector.

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 4.0	X16	X16	Low Profile or Full-height, half-length	Proc 1

Notes:

- Bus width indicated the number of electrical lanes running to the connector.
- Secondary riser supports both Low Profile or FHHL cards, when FHHL card is installed, slot 2 will not be available.

Storage Controllers

The Gen10/Gen10 Plus controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10/Gen10 Plus Smart Array controllers visit the

[HPE Smart Array Gen10 Controllers Data Sheet.](#)

HPE also launched Tri-Mode controllers which will support NVMe U.3/U.2 drives as well as SAS/SATA drives. Please see below list for the Tri-Mode controllers supported on the server.



Standard Features

NVMe Boot Device

- HPE NS204i-p NVMe PCIe3 OS Boot Device

Software RAID – HPE Smart Storage SR100i Gen10 Plus Software RAID

- All models feature an embedded storage controller, capable of operating on AHCI or SR100i Gen10 Plus modes, with embedded software supporting RAID for either up to 8 SATA drives or 2 U.3 NVMe SSDs.
- HPE Smart Storage SR100i Gen10 Plus SW RAID will operate in UEFI mode only. Legacy Mode (758959-B22) and SR100i Gen10 Plus SW RAID CAN NOT be selected together. For legacy support, an additional controller will be needed.
- Embedded SATA controller by default will work in AHCI Mode. HPE Smart Storage SR100i Gen10 Plus SW RAID can be enabled by selecting HPE SR100i Gen10 Plus Software RAID (P28417-B21).
- Supports Microsoft Windows Server only.

Notes: Requires SATA drives installed on following backplanes and drive bay position to support SR100i Gen10 Plus.

Part Number	Description	SR100i Gen10 Plus support
P38476-B21	HPE ProLiant DL325 Gen10 Plus v2 8SFF U.3 BC Backplane Kit	Up to 8 SATA at drive bay 1-8
P38470-B21	HPE ProLiant DL325 Gen10 Plus v2 4LFF SAS/SATA LP Backplane Kit	Up to 4 SATA at drive bay 1-4
P38473-B21	HPE ProLiant DL325 Gen10 Plus v2 8SFF SAS/SATA BC Backplane Kit	Up to 8 SATA at drive bay 1-8

Notes: Requires NVMe drives installed on following backplanes and drive bay position to support SR100i Gen10 Plus.

Part Number	Description	SR100i Gen10 Plus support
P38476-B21	HPE ProLiant DL325 Gen10 Plus v2 8SFF U.3 BC Backplane Kit	Up to 2 NVMe drive at box 1 bay 1-2
P38479-B21	HPE ProLiant DL325 Gen10 Plus v2 8SFF U.2 BC Backplane Kit	Up to 2 NVMe drive at box 1 bay 1-2
P38386-B21	HPE ProLiant DL325 Gen10 Plus v2 2SFF U.3 Enablement Kit	Up to 2 NVMe drive at box 2 bay 1-2
P38389-B21	HPE ProLiant DL325 Gen10 Plus v2 2SFF U.2 Enablement Kit	Up to 2 NVMe drive at box 2 bay 1-2

Notes: 2SFF U.3 enablement kit does not support SATA drives with SR100i Gen10 Plus. Only NVMe drives with this kit support SR100i Gen10 Plus.

Essential RAID Controller

- HPE Smart Array E208i-a SR Gen10 LH Controller
- HPE Smart Array E208e-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller

Performance RAID Controller

- HPE Smart Array P408i-a SR Gen10 LH Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P816i-a SR Gen10 LH Controller

Notes: Performance RAID Controllers require the HPE 12W Smart Storage Battery (782961-B21) which is sold separately.

HPE MegaRAID Gen10 Plus Controllers

- Broadcom MegaRAID MR416i-o x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus
- Broadcom MegaRAID MR416i-p x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus
- Broadcom MegaRAID MR216i-o x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus
- Broadcom MegaRAID MR216i-p x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus

HPE SmartRAID Gen10 Plus Controllers

- Microchip SmartRAID SR932i-p x32 Lanes 8GB Wide Cache NVMe/SAS 24G Controller for HPE Gen10 Plus
- Microchip SmartRAID SR416i-a x16 Lanes 4GB Cache NVMe/SAS 24G Controller for HPE Gen10 Plus



Standard Features

Internal Storage Devices

One of the following depending on model

Optical Drive

- None ship standard

Hard Drives

- None ship standard

Maximum Internal Storage		
	Capacity	Configuration
Hot Plug LFF SAS HDD	80 TB	4 x 20 TB
Hot Plug LFF SATA HDD	80 TB	4 x 20 TB
Hot Plug SFF SAS SSD	153 TB	10 x 15.3 TB
Hot Plug SFF SATA SSD	76.8 TB	10 x 7.68 TB
Hot Plug SFF NVMe PCIe U.3 SSD	153.6 TB	10 x 15.36 TB
Hot Plug SFF NVMe PCIe U.2 SSD	64 TB	10 x 6.4 TB

Interfaces	
Serial	Optional, rear
Video Port	1 Rear VGA Port - Standard
HPE iLO Remote Management Network Port	1 Gb Dedicated
Front iLO Service Port	1 standard
USB 3.1 Gen1	Up to 4 total: 1 front, 2 rear, 1 internal (secure)

Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% Power Efficiency.
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% Power Efficiency.
- HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 96% Power Efficiency.
 - 200-240VAC power input only.
- HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% Power Efficiency.
 - 277VAC power input.
- HPE 800W Flex Slot 48VDC Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% Power Efficiency.
 - -48VDC power input.
- HPE 1000W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% Power Efficiency.
 - 200-240VAC power input only.
- HPE 1600W 48VDC Power Supply Kit



Standard Features

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page. To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

Operating Systems and Virtualization Software Support for ProLiant Servers

- Windows Server 2016
- Windows Server 2019 (Most Recent Version)
- Windows Server 2022
- VMware ESXi 6.7 U3
- VMware ESXi 7.0 U1/U2
- [SUSE Linux Enterprise Server \(SLES\)](#) 12 SP5
- [SUSE Linux Enterprise Server \(SLES\)](#) 15 SP2
- [Red Hat Enterprise Linux \(RHEL\)](#) 8.3
- Citrix Hypervisor 8.2
- Ubuntu 20.04 LTS

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<https://www.hpe.com/us/en/servers/server-operating-systems.html>

Graphics

Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

HPE iLO 5 on system management memory

- 32 MB Flash
- 4 Gbit DDR 3 with ECC protection

Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 4.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- VGA Port
- USB 3.1 Gen1 Compliant (internal)
- Energy Star 4.0
- SMBIOS 3.1
- UEFI 2.6
- Redfish API
- IPMI 2.0
- Secure Digital 2.0
- Advanced Encryption Standard (AES)



Standard Features

- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- European Union (EU) eco-design regulations for server and storage products, known as Lot 9, mandate that beginning on January 1st, 2024, units sold into the EU, European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

- ASHRAE A3/A4

Notes: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>

- UEFI (Unified Extensible Firmware Interface Forum)

Notes: UEFI is the default for the DL325 Gen10 Plus. Legacy mode can be selected in the field or as a CTO option (758959-B22).

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at https://support.hpe.com/hpsc/public/docDisplay?docId=c04465280&docLocale=en_US

iLO RESTful API

iLO RESTful API is Redfish API conformance and offer simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.



Standard Features

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 Plus servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.1 Gen1 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization
- UEFI Boot Mode only
- NVMe Boot Support
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

Notes:

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.
- UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Plus Server.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at

[HPE Smart Update: Server Firmware and Driver Updates | HPE](#)

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9, Gen10 and Gen10 Plus HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.



Standard Features

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation (iLO 5 certification in progress)
- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 2.0 option
- Bezel Locking Kit option
- Chassis Intrusion detection option

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Services operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.hpe.com/support/ProLiantServers-Warranties>



Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

For a complete list of software as-a-service subscription SKUs and more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

For information on supported HPE servers, the complete list can be found here:

<https://www.hpe.com/info/com-supported-servers>

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9, Gen10 and Gen10 Plus servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so you're critical dense data center is covered in power outages.



Optional Features

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (OCS/SCE)

OCS/SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome>



Service and Support

HPE Services

No matter where you are in your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

Consulting Services

No matter where you are in your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](https://www.hpe.com/services/managed)

Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/completec>

HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>



Service and Support

HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

Notes: To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

Other Related Services from HPE Services:

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and services options.

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>



Service and Support

AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpsc/public/home/signin>

Consume IT On Your Terms

HPE GreenLake edge-to-cloud platform brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake edge-to-cloud platform accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE"

<https://www.hpe.com/us/en/contact-hpe.html>

For more information

<http://www.hpe.com/services>



Pre-configured Models

Pre-Configured models ship with the configurations below.

- Pre-Configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will not be shipped inside the server.
- Network Choice models do not include embedded LOM.

Base Models	
SKU Number	P72989-291
Model Name	HPE ProLiant DL325 Gen10 Plus v2 7203P 2.8GHz 8-core 1P 32GB-DR MR416i-a 8SFF 500W PS JP Server
Chassis	HPE ProLiant DL325 Gen10 Plus v2 8SFF Configure-to-order Server
Processor	7203P (8 core, 2.8 GHz, 120W)
Number of Processors	One with high performance heatsink
Memory	32 GB (1x32 GB, 3200 MT/s)
Network Controller	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE
Storage Controller	HPE MR416i-a Gen10 Plus x16 Lanes 4GB Cache NVMe/SAS 12G Controller and HPE 12W Smart Storage Lithium-ion Battery
Included Hard Drives	None ship standard, 8 SFF supported
Internal Storage	8 SFF Chassis (upgradeable to 8 SFF + 2 SFF front)
Optical Drive Bay	Optional
Optical Drive	Optional, None ship standard
Expansion Slots	2-slots (x16, x16) as standard
Power Supply	1x HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fans	8x Max Performance Fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)
Rail Kit	HPE ProLiant DL300 Gen10 Plus 1U SFF Easy Install Rail Kit
Security	TPM (Trusted Platform Module)
Energy Star	4.0 certified
Form Factor	1U Rack
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.



Pre-configured Models

Performance Models	
SKU Number	P55251-B21 P55251-291
Model Name	HPE ProLiant DL325 Gen10 Plus v2 7443P 2.85GHz 24-core 1P 32GB-R MR416i-a 8SFF 800W PS Server
Chassis	HPE ProLiant DL325 Gen10 Plus v2 8SFF Configure-to-order Server
Processor	7443P (24 core, 2.85 GHz, 200W)
Number of Processors	One with high performance heatsink
Memory	32 GB (1x32 GB, 3200 MT/s)
Network Controller	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE
Storage Controller	HPE MR416i-a Gen10 Plus x16 Lanes 4GB Cache NVMe/SAS 12G Controller and HPE 12W Smart Storage Lithium-ion Battery
Included Hard Drives	None ship standard, 8 SFF supported
Internal Storage	8 SFF Chassis (upgradeable to 8 SFF + 2 SFF front)
Optical Drive Bay	Optional
Optical Drive	Optional, None ship standard
Expansion Slots	2-slots (x16, x16) as standard
Power Supply	1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fans	8x Max Performance Fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)
Rail Kit	HPE ProLiant DL300 Gen10 Plus 1U SFF Easy Install Rail Kit
Security	TPM (Trusted Platform Module)
Energy Star	4.0 certified
Form Factor	1U Rack
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.



Pre-configured Models

Entry Models		
SKU Number	P38477-B21	P55250-B21 P55250-291
Model Name	HPE ProLiant DL325 Gen10 Plus v2 7313P 3.0GHz 16-core 1P 32GB-R 8SFF 500W PS Server	HPE ProLiant DL325 Gen10 Plus v2 7313P 3.0GHz 16-core 1P 32GB-R MR416i-a 8SFF 500W PS Server
Chassis	HPE ProLiant DL325 Gen10 Plus v2 8SFF Configure-to-order Server	
Processor	7313P (16 core, 3.0 GHz, 155W)	
Number of Processors	One with high performance heatsink	
Memory	32 GB (1x32 GB, 3200 MT/s)	
Network Controller	Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	
Storage Controller	HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller and HPE 12W Smart Storage Lithium-ion Battery	HPE MR416i-a Gen10 Plus x16 Lanes 4GB Cache NVMe/SAS 12G Controller and HPE 12W Smart Storage Lithium-ion Battery
Included Hard Drives	None ship standard, 8 SFF supported	
Internal Storage	8 SFF Chassis (upgradeable to 8 SFF + 2 SFF front)	
Optical Drive Bay	Optional	
Optical Drive	Optional, None ship standard	
Expansion Slots	2-slots (x16, x16) as standard	
Power Supply	1x HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	
Fans	8x Standard Fans	8x Max Performance Fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)	
Rail Kit	HPE ProLiant DL300 Gen10 Plus 1U SFF Easy Install Rail Kit	
Security	TPM (Trusted Platform Module)	
Energy Star	4.0 certified	
Form Factor	1U Rack	
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.	

Country Code Key

- B21 = Worldwide
- 291 = Japan
- 371 = Asia Pacific
- 421 = Europe, the Middle East and Africa



Configuration Information

European Union (EU) eco-design regulations for server and storage products mandate that beginning on January 1st, 2024, units sold into the EU, European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

For more information regarding HPE Lot 9 conformance, please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

CTO Server	HPE ProLiant DL325 Gen10 Plus v2 8SFF CTO Server	HPE ProLiant DL325 Gen10 Plus v2 4LFF CTO Server
SKU Number	P38471-B21	P38474-B21
Processor	Not included as standard	Not included as standard
DIMM Slots	16-DIMM slots	16-DIMM slots
Storage Controller	Choice of HPE modular Smart Array and PCIe plug-in controller	
PCIe	Two standard in primary riser	Two standard in primary riser
Drive Cage - included	8 SFF (Backplane is not included)	4 LFF (Backplane is not included)
Network Controller	Choice of OCP and stand up card	
Fans	Not included as standard	
Management	HPE iLO with Intelligent Provisioning (standard), iLO Advances and OneView (optional)	
USB	Front: 1 USB 3.1 Gen1 + iLO service port Rear: 2 USB 3.1 Gen1 Internal: 1 USB 3.1 Gen1	Front: 1 USB 3.1 Gen1 + iLO service port Rear: 2 USB 3.1 Gen1 Internal: 1 USB 3.1 Gen1

Notes:

- HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- All CTO servers are Energy Star 4.0 compliant.
- CTO servers do not ship with rail kits, they need to be ordered separately

Configuration Information

CTO Server	8 SFF CTO Chassis	4 LFF Chassis
Included Drive Cage	8 SFF	4 LFF
Universal Media Bay	Optional	Not Available
ODD	1 Optional	1 Optional
4 LFF SAS/SATA	Not Available	1 Optional
8 SFF SAS/SATA	1 Optional	Not Available
8 SFF NVMe	1 Optional	Not Available
2 SFF SAS/SATA	1 Optional	Not Available
2 SFF NVMe	1 Optional	Not Available



Configuration Information

Notes:

- This applies to CTO configurations, field upgrades may differ depending field configuration.
- Backplane kits need to be ordered separately for CTO servers

Step 2: Choose Required Options (only one of the following unless otherwise noted)

Please select one –B21 processor required below.

Notes: DDR4 memory speed will depend on the quantity and type of DIMMs installed

Step 2a: Choose Processors**Processor Option Kits**

	SKU
AMD EPYC 7763 2.45GHz 64-core 280W Processor for HPE	P38696-B21
AMD EPYC 7713P 2.0GHz 64-core 225W Processor for HPE	P38720-B21
AMD EPYC 7663 2.0GHz 56-core 240W Processor for HPE	P38690-B21
AMD EPYC 7643 2.3GHz 48-core 225W Processor for HPE	P39365-B21
AMD EPYC 75F3 2.95GHz 32-core 280W Processor for HPE	P38708-B21
AMD EPYC 7543P 2.8GHz 32-core 225W Processor for HPE	P38717-B21
AMD EPYC 7513 2.6GHz 32-core 200W Processor for HPE	P38684-B21
AMD EPYC 7453 2.75GHz 28-core 225W Processor for HPE	P38678-B21
AMD EPYC 74F3 3.2GHz 24-core 240W Processor for HPE	P38705-B21
AMD EPYC 7443P 2.85GHz 24-core 200W Processor for HPE	P38714-B21
AMD EPYC 7413 2.65GHz 24-core 180W Processor for HPE	P38675-B21
AMD EPYC 73F3 3.5GHz 16-core 240W Processor for HPE	P38702-B21
AMD EPYC 7343 3.2GHz 16-core 190W Processor for HPE	P38672-B21
AMD EPYC 7313P 3.0GHz 16-core 155W Processor for HPE	P38711-B21
AMD EPYC 72F3 3.7GHz 8-core 180W Processor for HPE	P38699-B21
AMD EPYC 7773X 2.2GHz 64-core 280W Processor for HPE	P46915-B21
AMD EPYC 7573X 2.8GHz 32-core 280W Processor for HPE	P46921-B21
AMD EPYC 7473X 2.8GHz 24-core 240W Processor for HPE	P46924-B21
AMD EPYC 7373X 3.05GHz 16-core 240W Processor for HPE	P46927-B21
AMD EPYC 7203P 2.8GHz 8-core 120W Processor for HPE	P66936-B21
AMD EPYC 7303P 2.4GHz 16-core 130W Processor for HPE	P66938-B21
AMD EPYC 7643P 2.3GHz 48-core 225W Processor for HPE	P66939-B21
AMD EPYC 7663P 2.0GHz 56-core 240W Processor for HPE	P66940-B21

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 Plus memory population rule whitepaper and optimal memory performance guidelines, please go to:

<http://www.hpe.com/docs/amd-population-rules-Gen10Plus>

Notes:

- Memory DIMM availability with a server platform is dependent upon completion of certification testing.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.



Configuration Information

- Memory compatibility may vary or be limited within a specific server family depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for a server model or family and yet occasionally not be supported with limited configurations within that server family. Please consult with the HPE server Quickspecs or your HPE representative if you have any questions regarding memory compatibility with a specific HPE server configuration.

Registered DIMMs (RDIMMs)

HPE 8GB (1x8GB) Single Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P07638-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit.	P07640-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P07642-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P07646-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P07650-B21

Load Reduced DIMMs (LRDIMMs)

HPE 128GB (1x128GB) Quad Rank x4 DDR4-3200 CAS-22-22-22 Load Reduced Smart Memory Kit	P07652-B21
HPE 256GB (1x256GB) Octal Rank x4 DDR4-3200 CAS-26-22-22 Load Reduced 3DS Smart Memory Kit	P07654-B21

Notes:

- When 256GB LRDIMM is supported, the HPE ProLiant DL325 Gen10 Plus v2 Max Perf Fan Kit (P38506-B21) needs to be selected
- Mixing of x4 & x8 memory is not allowed
- 8GB~128GB memory SKUs can run the transfer rate of 3200 MT/s at both 1 DIMM and 2 DIMM per channel
- 256GB memory SKU can run the transfer rate of 3200 MT/s at 1 DIMM per channel, but only 2933 MT/s at 2 DIMM per channel

Step 2c: Choose Power Supplies

Select one or two power supplies from below.

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21
HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P03178-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38997-B21

Notes:

- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:
<http://www.hpe.com/info/hppoweradvisor>.
- All power supplies in a server should match. Mixing Power Supplies is not supported.



Configuration Information

Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

HPE Unique Options

HPE DL325 Gen10 Plus x16 Low Profile PCIe Riser Kit

P17264-B21

Notes:

- This riser sits into the secondary PCIe slot
- This riser can support only low profile PCIe Cards
- x16 LP Riser Kit and x16 FHHL Riser Kit cannot be selected together.

HPE DL325 Gen10 Plus x16 FHHL PCIe Riser Kit

P20421-B21

Notes:

- When HPE DL325 Gen10 Plus FHHL PCIe Riser Kit is selected then Slot 2 cannot be used
- 16 LP Riser Kit and x16 FHHL Riser Kit cannot be selected together.
- This riser can support only FHHL PCIe Cards

HPE ProLiant DL325 Gen10 Plus v2 8SFF SAS/SATA BC FIO Backplane Kit

P38473-B21

Notes:

- Mixing of LFF & SFF Backplane/Drive cage are not allowed.
- One Standard Fan Kit (P41471-B21) must be selected if this backplane kit is supported.

HPE ProLiant DL325 Gen10 Plus v2 8SFF U.3 BC FIO Backplane Kit

P38476-B21

Notes:

- Mixing of LFF & SFF Backplane/Drive cage are not allowed.
- If this Backplane Kit is selected along with Tri-Mode Controller then SAS/SATA/NVMe U.3 drives can be selected. If this Backplane Kit is selected without Tri-Mode Controller then only NVMe U.3 drives can be selected.
- 2SFF U.2 NVMe backplane kit (P38389-B21) cannot be selected with this backplane kit.
- One Maximum Performance Fan Kit (P38506-B21) must be selected if this backplane kit is supported.

HPE ProLiant DL325 Gen10 Plus v2 8SFF U.2 BC FIO Backplane Kit

P38479-B21

Notes:

- Mixing of LFF & SFF Backplane/Drive cage are not allowed.
- If 2SFF SAS/SATA/U.3 NVMe backplane kit (P38386-B21) is selected along with this backplane kit, then P38386-B21 can support only SFF SAS/SATA drives.
- One Maximum Performance Fan Kit (P38506-B21) must be selected if this backplane kit is supported.

HPE ProLiant DL325 Gen10 Plus v2 2SFF U.3 Enablement Kit

P38386-B21

Notes:

- Mixing of LFF & SFF Backplane/Drive cage are not allowed.
- For 8SFF models, customer can select max q'ty=1 of either the 2SFF SAS/SATA/U.3 NVMe Enablement Kit (P38386-B21) or 2SFF U.2 NVMe Enablement Kit (P38389-B21)
- If this backplane kit is selected along with 8SFF SAS/SATA/U.2 NVMe Basic Carrier Backplane Kit (P38479-B21), then this backplane kit can support only SFF SAS/SATA drives.
- Cannot be selected with following MegaRAID controllers (MR416i-a, MR216i-a, MR416i-p, MR216i-p)

HPE ProLiant DL325 Gen10 Plus v2 2SFF U.2 Enablement Kit

P38389-B21

Notes:

- Mixing of LFF & SFF Backplane/Drive cage are not allowed.
- For 8SFF models, customer can select max q'ty=1 of either the 2SFF SAS/SATA/U.3 NVMe Enablement Kit (P38386-B21) or 2SFF U.2 NVMe Enablement Kit (P38389-B21)



Configuration Information

- This backplane kit cannot be selected with 8SFF SAS/SATA/U.3 NVMe Basic Carrier Backplane Kit (P38476-B21)

HPE ProLiant DL325 Gen10 Plus v2 4LFF SAS/SATA LP FIO Backplane Kit

P38470-B21

Notes:

- Mixing of LFF & SFF Backplane/Drive cage are not allowed.
- One Standard Fan Kit (P41471-B21) must be selected if this backplane kit is supported.

BIOS Mode

HPE Legacy FIO Mode Setting

758959-B22

Notes:

- UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.
- If Legacy FIO Mode Setting (758959-B22) is selected with Embedded controller (in AHCI mode) as primary controller then RAID Setting is not supported.
- The Legacy Mode Setting (758959-B22) and HPE Dual 8GB microSD EM USB Kit / 32GB microSD CANNOT be selected together.

HPE Converged Infrastructure Management Software

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView Upgrade from Insight Management 3yr 24x7 Support 1-server LTU	F6Q91A
HPE OneView including 3yr 24x7 Support Track 1-server LTU	E5Y36A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support Bundle Track 1-server LTU	E5Y44A
HPE OneView Upgrade from Insight Management including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y45AAE

Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.



Core Options

HPE Unique Options

HPE ProLiant DL325 Gen10 Plus v2 Standard FIO Fan Kit	P41471-B21
Notes: This is required if 4 LFF chassis or 8 SFF SAS/SATA backplane is selected.	
HPE ProLiant DL325 Gen10 Plus v2 Max Performance Fan Kit	P38506-B21
Notes:	
– This kit is required when 8 SFF NVMe U.3 or U.2 backplanes are selected or when CPU =280W and or when any of the below options are selected:	
o HPE IB HDR/EN 200Gb 1p QSFP56 OCP3 Adptr (P31323-B21)	
o HPE IB HDR/EN 200Gb 2p QSFP56 OCP3 Adptr (P31348-B21)	
o HPE IB HDR/EN 200Gb 2p QSFP56 Adptr (P31324-B21)	
o HPE 100GbE 1p QSFP28 MCX515A-CCAT Adptr (P31246-B21)	
o MLX MCX623106AS 100GbE 2p QSFP56 Adptr (P25960-B21)	
o MLX MCX623105AS 200GbE 1p QSFP56 Adptr (P10180-B21)	
o INT E810 100GbE 2p QSFP28 OCP3 Adptr (P22767-B21)	

HPE Optical Drives

HPE 9.5mm SATA DVD-ROM Optical Drive	726536-B21
HPE 9.5mm SATA DVD-RW Optical Drive	726537-B21
HPE Mobile USB DVD-RW Optical Drive	701498-B21

Notes:

- If optical drive is selected along with 4 LFF chassis then LFF ODD SATA M.2 Cable (P39141-B21) must be selected.
- If optical drive is selected along with 8 SFF chassis then SFF ODD SATA M.2 Cable (P39144-B21) must be selected.

Enterprise - 12G SAS - SFF Drives

HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P28028-B21
HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P40430-B21
HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P40432-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P28586-B21
HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P28352-B21
HPE 600GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P53560-B21
HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P53561-B21
HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P53562-B21

Midline - 12G SAS - LFF Drives

HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833926-B21
HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833928-B21
HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861746-B21
HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834031-B21
HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881781-B21
HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	P09155-B21
HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23608-B21
HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53553-B21

Midline - 6G SATA - LFF Drives

HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861686-B21
HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861681-B21
HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861683-B21
HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861742-B21
HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834028-B21
HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881787-B21



Core Options

HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23449-B21
HPE 18TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P37678-B21
HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53554-B21

SED (Self-Encryption Drive)

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD	P28618-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Self-encrypting FIPS HDD	P28622-B21
HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58244-B21
HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58236-B21

Notes:

- Requirements for MR Tri-Mode controller SED support
 - TPM is not required for Local Key Management as key is stored in controller
 - iLO Advanced is required for Remote Key Management. Key is stored in remote key manager } (Ex. ESKM)

SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 Plus servers and to provide the best product availability, HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

Read Intensive - 12G SAS - SFF - Solid State Drives

HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21
HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40506-B21
HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49031-B21
HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40507-B21
HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49035-B21
HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40508-B21
HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49041-B21
HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40509-B21
HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49045-B21

Mixed Use - 12G SAS - SFF - Solid State Drives

HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49047-B21
HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40510-B21
HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49049-B21
HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40511-B21
HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49053-B21
HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40512-B21
HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49057-B21

Mixed Use SAS- LFF- Solid State Drives

HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	P37009-B21
--	------------

Mixed Use - 6G SATA - SFF - Solid State Drives

HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40502-B21
HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40503-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40504-B21
HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40505-B21

Read Intensive - 6G SATA - SFF - Solid State Drives

HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40496-B21
HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40497-B21
HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40500-B21
HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40501-B21



Core Options

HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	P63886-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	P63910-B21
Read Intensive – 6G SATA - LFF – Solid State Drives	
HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	P47808-B21
Read Intensive - NVMe - SFF - Solid State Drives	
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	P51453-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	P51455-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	P51457-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64842-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64844-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64846-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64848-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63829-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63833-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63837-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63841-B21
HPE 15.36TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static SPDM Multi Vendor SSD	P69255-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70434-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70436-B21
Mixed Use - NVMe - SFF - Solid State Drives	
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	P51459-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	P51461-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	P51463-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P64999-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65007-B21
HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65015-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65023-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63845-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63849-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63853-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70426-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70428-B21
SED (Self-Encryption Drive)	
HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	P41399-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41403-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58248-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58240-B21
HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63871-B21
HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63875-B21



Core Options

Notes:

- Requirements for Direct Attach SED support
 - o TPM2.0 is required for Local Key Management. Keys will be locally encrypted and stored by TPM
 - o iLO Advanced is required for Remote Key Management. Key is stored in remote key manager (Ex. ESKM)
- Requirements for MR Tri-Mode controller SED support
 - o TPM is not required for Local Key Management as key is stored in controller
 - o iLO Advanced is required for Remote Key Management. Key is stored in remote key manager (Ex. ESKM)

Internal Dual M.2 Kit

HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit

878783-B21

Notes:

- This M.2 SSD Enablement Kit requires the selection of M.2 SSD Drives (Min 1 // Max 2)
 - o For 4LFF Model:
M.2 kit requires the selection of one qty of LFF ODD SATA M.2 cable (P39141-B21)
 - o For 8SFF Model:
M.2 kit requires the selection of one qty of SFF ODD SATA M.2 cable (P39144-B21).
- One qty of LFF ODD SATA M.2 cable (P39141-B21) or SFF ODD SATA M.2 cable (P39144-B21) can support both HPE Universal SATA HH M.2 Kit and Optical Disk Drive (726536-B21/726537-B21).
- M.2 kit and 2SFF SATA cable (P39156-B21) cannot be selected together
- M.2 SATA SSDs attached to this enablement kit do not support SR100i Gen10 Plus.
- This kit requires a PCIe slot and supports up to two M.2 SSDs which should be the same SSD SKUs

Read Intensive - M.2 - Solid State Drives

HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD

P47818-B21

Hard Drive Blank Kits

HPE Gen9 LFF HDD Spade Blank Kit

807878-B21

HPE Small Form Factor Hard Drive Blank Kit

666987-B21

HPE Smart IO

Requirements:

- One 3yr/4yr/5yr Silver or 3yr/4yr/5yr Platinum license must be purchased for every DSC-25 card in a server.
- 1yr Silver, 1yr Platinum, and 1yr Policy and Services Manager (PSM) licenses are reserved for renewals only.
- One Policy and Services Manager (PSM) license is required to manage up to 3,000 DSC-25 cards.

Pensando Distributed Services Card (DSC)

Pensando Distributed Services Platform DSC-25 Enterprise 10/25Gb 2-port SFP28 Card

P26966-B21

Notes: Each card instance requires one RTU license of Silver or Platinum software. In case of more than one adapter, RTU licenses doesn't need to be of the same part number.

HPE Networking

1 Gigabit Ethernet adapters

Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE

P21106-B21

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE

P51178-B21

10 Gigabit Ethernet adapters

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE

P26259-B21

Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE

P28787-B21

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE

P26253-B21

10/25 Gigabit Ethernet adapters

Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P13188-B21

Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P42044-B21



Core Options

Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P21109-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P26262-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P08458-B21

100/200 Gigabit Ethernet adapters

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE	P21112-B21
HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter	829335-B21
HPE Ethernet 100Gb 1-port QSFP28 PCIe3 x16 MCX515A-CCAT Adapter	P31246-B21
Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21
Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE	P10180-B21

Notes: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://h20195.www2.hpe.com/v2/getpdf.aspx/A00002507ENW.pdf?>

HPE Slingshot SA210S Ethernet 200Gb 1-port PCIe NIC

R4K46A

Recommended System Ambient Temperature				
PCIe Slot	P21112-B21	P31246-B21	P25960-B21	P10180-B21
Slot 1	35C	30C	30C	30C
Slot 2	25C	25C	25C	25C
Slot 3	Not Support	Not Support	Not Support	Not Support

OCP Adapters

Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P08449-B21
Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P51181-B21
Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21
Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P28778-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10112-B21
Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P42041-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10106-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21

Notes: Max support ambient temp. = 30C

HPE InfiniBand

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 OCP3 MCX653435A-HDAI Adapter	P31323-B21
--	------------

Notes:

- Max support ambient temp. = 30C
- When supported with AOC (Active Optical Cables), max support ambient temperature will drop by 3C (27C)

HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 OCP3 MCX653436A-HDAI Adapter	P31348-B21
--	------------

Notes:

- Max support ambient temp. = 30C
- When supported with AOC (Active Optical Cables), max support ambient temperature will drop by 3C (27C)

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 MCX653105A-HDAT Adapter	P23664-B21
HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 MCX653106A-HDAT Adapter	P31324-B21
HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe4 x16 MCX653105A-ECAT Adapter	P23665-B21
HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe4 x16 MCX653106A-ECAT Adapter	P23666-B21



Core Options

Recommended System Ambient Temperature				
PCIe Slot	P23664-B21	P31324-B21	P23665-B21	P23666-B21
Slot 1	35C	35C	35C	35C
Slot 2	30C	25C	35C	25C
Slot 3	Not Support	Not Support	25C	Not Support

Notes: When supported with AOC (Active Optical Cables), ambient temperature will follow below restrictions:

Recommended System Ambient Temperature				
PCIe Slot	P23664-B21	P31324-B21	P23665-B21	P23666-B21
Slot 1	32C	32C	32C	32C
Slot 2	27C	22C	32C	22C
Slot 3	Not Support	Not Support	22C	Not Support

Notes:

- The AOC cables are:
 - P28169-B21 HPE IB HDR 200Gb QSFP56 3m AOC
 - P28169-B22 HPE IB HDR 200Gb QSFP56 5m AOC
 - P28169-B23 HPE IB HDR 200Gb QSFP56 10m AOC
 - P28169-B24 HPE IB HDR 200Gb QSFP56 15m AOC
 - P28169-B25 HPE IB HDR 200Gb QSFP56 20m AOC
 - P28169-B26 HPE IB HDR 200Gb QSFP56 30m AOC

Recommended System Ambient Temperature				
PCIe Slot	878038-B21 (Max =2 in slot1&2)	P26934-B21 (Max =1)		
Slot 1	35C	35C		
Slot 2	25C	Not Support		
Slot 3	Not Support	Not Support		

HPE Graphic Options

NVIDIA T4 16GB Computational Accelerator for HPE

ROW29C

Notes:

- This is a PCIe 3.0 x16 Single Width GPU card
- HPE DL325 Gen10+ x16 FHHL PCIe Riser Kit(P20421-B21) needs to be selected, if more than one Graphics card is supported
- This card is supported at PCIe slot 1 and 3 only

NVIDIA A2 16GB PCIe Non-CEC Accelerator for HPE

R9H23C

HPE Cooling Options

HPE ProLiant DL325 Gen10 Plus v2 High Performance FIO Heat Sink Kit

P41197-B21

HPE ProLiant DL325 Gen10 Plus v2 Standard FIO Fan Kit

P41471-B21

Notes:

- The Standard Fan Kit and the Maximum Performance Fan Kit cannot be selected together
- Standard Fan Kit must be selected if any of the below options is in the order:
4 LFF Model, 8SFF SAS/SATA BP (P38473-B21)



Core Options

HPE ProLiant DL325 Gen10 Plus v2 Max Performance Fan Kit P38506-B21

Notes:

- The Standard Fan Kit and the Maximum Performance Fan Kit cannot be selected together
- Max Perf Fan Kit (P38506-B21) can also support the configurations supported by a Standard Fan Kit (P41471-B21)
- Max Perf Fan Kit (P38506-B21) must be selected if any of the below options is in the order
 - 8SFF NVMe U.3 BP (P38476-B21)
 - 8SFF NVMe U.2 BP (P38479-B21)
 - HPE IB HDR/EN 200Gb 1p QSFP56 OCP3 Adptr (P31323-B21)
 - HPE IB HDR/EN 200Gb 2p QSFP56 OCP3 Adptr P31348-B21)
 - HPE IB HDR/EN 200Gb 2p QSFP56 Adptr (P31324-B21)
 - HPE 100GbE 1p QSFP28 MCX515A-CCAT Adptr (P31246-B21)
 - MLX MCX623106AS 100GbE 2p QSFP56 Adptr (P25960-B21)
 - MLX MCX623105AS 200GbE 1p QSFP56 Adptr (P10180-B21)
 - INT E810 100GbE 2p QSFP28 OCP3 Adptr (P22767-B21)
 - Processors with 280W

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

Notes: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit 865438-B21

Notes: Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38995-B21

Notes: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit 865434-B21

Notes: Flex Slot -48VDC power supplies support power efficiency of up to 94%

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit 865428-B21

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38997-B21

Notes:

- Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.
- Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.
- All power supplies in a server should match. Mixing Power Supplies is not supported.
- Option kits contain the specified power supply and a PDU IEC cable.
- 1600W power supplies only support high line voltage.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.



Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Embedded Management

HPE iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Common Password FIO Setting	P08040-B21

Software as a Service Management

HPE GreenLake for Compute Ops Management

HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS	R7A11AAE
--	----------

Additional Options

HPE GreenLake for Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS	R7A10AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS	R7A12AAE

Notes: For customers purchasing HPE GreenLake for Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

HPE GreenLake for Compute Ops Management Base SaaS	R6Z73AAE
--	----------

HPE Converged Infrastructure Management Software

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Notes: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be [downloaded](#).

HPE Security

HPE Server Platform LDevID FIO Setting	P49803-B21
--	------------

Notes:

- Directs HPE manufacturing site to create, digitally sign and store a platform certificate on the server
- Requires HPE Trusted Platform Module (TPM)
- Locally Significant Device Identifier (LDevID) certificates are part of a Zero Trust Architecture. This SKU instructs factory to provision LDevID on HPE iLO

HPE Server Identity LDevID FIO Setting	P49814-B21
--	------------

Notes: Locally Significant Device Identifier (LDevID) certificates are part of a Zero Trust Architecture. This SKU instructs factory to only provision LDevID on HPE iLO

HPE DL325 Gen10 Plus Bezel Kit	P18547-B21
HPE Bezel Lock Kit	875519-B21



Additional Options

HPE Gen10 TPM 1.2 FIO Setting	872108-B21
HPE Trusted Platform Module 2.0 Gen10 Plus Black Rivets Kit	P13771-B21
HPE Gen10 Plus Chassis Intrusion Detection Kit	P14604-B21

Notes: This provides a physical connection from the chassis board and hood and detects any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving, distribution, and operation.

HPE Boot Controllers

HPE NS204i-p x2 Lanes NVMe PCIe3 x8 OS Boot Device	P12965-B21
--	------------


Notes: Requires UEFI, not supported on Legacy Mode.

HPE Smart Storage SR100i SR Gen10 Plus SW RAID

HPE SR100i Gen10 Plus FIO Software RAID	P28417-B21
---	------------

Notes: Requires UEFI, not supported on Legacy Mode.

HPE Smart Array Controllers

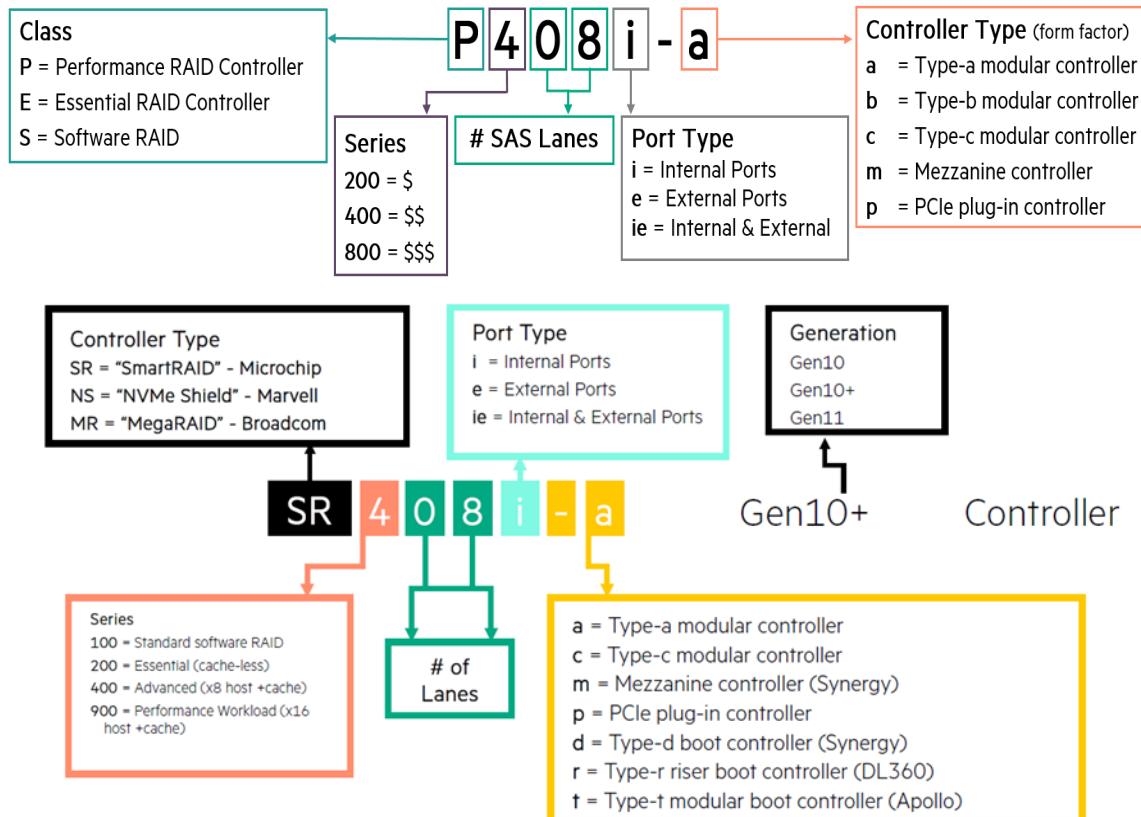

Smart Array Controllers

HPE 12W Smart Storage Lithium-ion Battery	782961-B21
---	------------

Notes: All performance RAID controllers are supported by the HPE Smart Storage Battery (782961-B21), which supports multiple devices and is sold separately

HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller	869083-B21
--	------------

Notes: Does not occupy a PCIe expansion slot and includes SmartCache license.

Additional Options

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller 869081-B21

Notes: Does not occupy a PCIe expansion slot.

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller 804405-B21

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller 830824-B21

Essential RAID Controllers

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804394-B21

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller 869079-B21

Notes: Does not occupy a PCIe expansion slot.

SmartRAID Gen10 Plus Controllers

Microchip SmartRAID SR932i-p x32 Lanes 8GB Wide Cache NVMe/SAS 24G Controller for HPE Gen10 Plus P04220-B21

Notes:

- This option kit supports below drive cage
 - o HPE ProLiant DL325 Gen10 Plus v2 8SFF U.3 BC Backplane Kit (P38476-B21)
 - o HPE ProLiant DL325 Gen10 Plus v2 8SFF U.2 BC Backplane Kit (P38479-B21)
 - o HPE ProLiant DL325 Gen10 Plus v2 2SFF U.3 Enablement Kit (P38386-B21)
 - o HPE ProLiant DL325 Gen10 Plus v2 2SFF U.2 Enablement Kit (P38389-B21)

Microchip SmartRAID SR416i-a x16 Lanes 4GB Cache NVMe/SAS 24G Controller for HPE Gen10 Plus P12688-B21

MegaRAID Gen10 Plus Controllers

HPE MR416i-p Gen10 Plus x16 Lanes 4GB Cache NVMe/SAS 12G Controller P06367-B21

HPE MR416i-a Gen10 Plus x16 Lanes 4GB Cache NVMe/SAS 12G Controller P26279-B21

HPE MR216i-p Gen10 Plus x16 Lanes without Cache NVMe/SAS 12G Controller P26324-B21

HPE MR216i-a Gen10 Plus x16 Lanes without Cache NVMe/SAS 12G Controller P26325-B21

HPE Cable Options

HPE ProLiant DL325 Gen10 Plus v2 SATA FIO Cable Kit P39134-B21

HPE ProLiant DL325 Gen10 Plus v2 Smart Array Cable Kit P39137-B21

Notes: This option kit is required to support AROC type Smart Array controller with 4LFF/8SFF drive cages

HPE ProLiant DL325 Gen10 Plus v2 SFF Smart Array PCIe Cable Kit P39147-B21

Notes: This option kit is required to support E208i-p/P408i-p Smart Array controller with 8SFF drive cage

HPE ProLiant DL325 Gen10 Plus v2 10SFF P816i-a Cable Kit P39151-B21

Notes: This option kit is required to support 10SFF drives connected to P816i-a controller

HPE ProLiant DL325 Gen10 Plus v2 2SFF SATA Cable Kit P39156-B21

Notes: This option kit is required to support 2SFF SATA drives

HPE ProLiant DL325 Gen10 Plus v2 2SFF Smart Array Cable Kit P39159-B21

Notes: This option kit is required to support 2SFF with E208i-a/P408i-a controller

HPE ProLiant DL325 Gen10 Plus v2 2SFF Smart Array PCIe Cable Kit P39162-B21

Notes: This option kit is required to support E208i-p/P408i-p Smart Array controller with 2SFF drive cage

HPE ProLiant DL325 Gen10 Plus v2 2SFF NVMe Direct Attach Cable Kit P39165-B21

Notes: This option kit is required to support Direct Attach NVMe drives with 2SFF drive cages

HPE ProLiant DL325 Gen10 Plus v2 2SFF NVMe Tri-Mode Cable Kit P39168-B21

Notes: This option kit is required to support modular Tri-Mode controllers with NVMe drives with 2SFF drive cages



Additional Options

HPE ProLiant DL325 Gen10 Plus v2 2SFF NVMe Tri-Mode PCIe Cable Kit	P39171-B21
Notes: This option kit is required to support PCIe Tri-Mode controllers with NVMe drives with 2SFF drive cages	
HPE ProLiant DL325 Gen10 Plus v2 8SFF NVMe Direct Attach FIO Cable Kit	P39174-B21
Notes: This option kit is required to support Direct Attach NVMe drives with 8SFF drive cages	
HPE ProLiant DL325 Gen10 Plus v2 8SFF SR932i-p NVMe Tri-Mode PCIe Cable Kit	P39180-B21
Notes: This option kit is required to support PCIe Tri-Mode controller "SR932i-p" with NVMe drives with 8SFF drive cages	
HPE ProLiant DL325 Gen10 Plus v2 4SFF NVMe Tri-Mode Cable Kit	P39185-B21
Notes: This option kit is required to support modular Tri-Mode controllers with 4x SFF NVMe drives	
HPE ProLiant DL325 Gen10 Plus v2 4SFF NVMe Tri-Mode PCIe Cable Kit	P39189-B21
Notes: This option kit is required to support PCIe Tri-Mode controllers with 4x SFF NVMe drives	
HPE ProLiant DL325 Gen10 Plus v2 10SFF SR932i-p NVMe Tri-Mode PCIe Cable Kit	P39193-B21
Notes: This option kit is required to support PCIe Tri-Mode controller "SR932i-p" with 10x SFF NVMe drives	
HPE ProLiant DL325 Gen10 Plus v2 8SFF NVMe Tri-Mode Cable Kit	P39198-B21
HPE ProLiant DL325 Gen10 Plus v2 LFF Optical Disk Drive SATA M.2 Cable Kit	P39141-B21
HPE ProLiant DL325 Gen10 Plus v2 SFF Optical Disk Drive SATA M.2 Cable Kit	P39144-B21
Notes:	
– If optical drive or HPE Universal SATA HH M.2 Kit is selected along with 4 LFF chassis then LFF ODD SATA M.2 Cable (P39141-B21) must be selected.	
– If optical drive or HPE Universal SATA HH M.2 Kit is selected along with 8 SFF chassis then SFF ODD SATA M.2 Cable (P39144-B21) must be selected.	
HPE ProLiant DL325 Gen10 Plus v2/DL345 Gen10 Plus OCP Upgrade Cable Kit	P39732-B21
Notes: This cable kit must be selected If any of the below option is selected:	
– HPE 10/25GbE 2p SFP28 MCX562A OCP3 Adptr (P10112-B21)	
– HPE IB HDR/EN 200Gb 2p QSFP56 OCP3 Adptr (P31348-B21)	
– HPE IB HDR/EN 200Gb 1p QSFP56 OCP3 Adptr (P31323-B21)	
– INT E810 100GbE 2p QSFP28 OCP3 Adptr (P22767-B21)	
HPE ProLiant DL325 Gen10 Plus v2 8SFF/4LFF Mini SAS to Slim SAS AROC to SAS/SATA Tri-Mode Cable Kit	P55528-B21
Notes: This option kit is required to support 8SFF SAS/SATA or 4LFF backplanes along with AROC Tri-Mode controllers "MR416i-a" or "MR216i-a"	
HPE ProLiant DL325 Gen10 Plus v2 8SFF Mini SAS to Slim SAS PCIe Tri-Mode Cable Kit	P55626-B21
Notes: This option kit is required to support 8SFF SAS/SATA backplane along with PCIe Tri-Mode controllers "MR416i-p" or "MR216i-p"	
HPE DL3XX Gen10 Rear Serial Cable and Enablement Kit	873770-B21

HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products

<http://www.hpe.com/storage/BURAcompatibility>.

Additional Options

HPE Storage Options

Emulex Fibre Channel HBAs

HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter	Q0L13A
HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter	Q0L14A
HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter	R2J62A
HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter	R2J63A
HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter	R7N77A
HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter	R7N78A

QLogic Fibre Channel HBAs

HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter	P9D93A
HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter	R2E09A

Storage Offload Adapter

HPE NV60100M 100Gb 2-port Storage Offload Adapter	R8M41A
HPE Ethernet 10/25Gb 2-port Secure Network Adapter	S2A69A

HPE Racks

- Please see the HPE Advanced Series Racks QuickSpecs for information on additional racks options and rack specifications.
[**HPE G2 Advanced Series Racks**](#)
- Please see the HPE Enterprise Series Racks QuickSpecs for information on additional racks options and rack specifications.
[**HPE G2 Enterprise Series Racks**](#)

HPE Power Distribution Units (PDUs)

- Please see the [**HPE Basic Power Distribution Units \(PDU\) QuickSpecs**](#) for information on these products and their specifications.
- Please see the [**HPE Metered Power Distribution Units \(PDU\) QuickSpecs**](#) for information on these products and their specifications.
- Please see the [**HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs**](#) for information on these products and their specifications.
- Please see the [**HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs**](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [**HPE Uninterruptible Power Systems \(UPS\) web page**](#).
- Please see the [**HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs**](#) for information on these products and their specifications.
- Please see the [**HPE Line Interactive Single Phase UPS QuickSpecs**](#) for information on these products and their specifications.

HPE Rack Options

- Please see the [**HPE KVM Switches web page**](#) for information on these products and their specifications.



Additional Options

Rail Kits

Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (695539-001).

Notes:

- HPE rail kits are designed to work with HPE racks in compliance with industry standard EIA-310-E. In the event a customer elects to purchase a third-party rack for use with an HPE rail kit, any such use is at customer's own risk. HPE makes no express or implied warranties with respect to such third-party racks and specifically disclaims any implied warranties of merchantability and fitness for a particular purpose. Furthermore, HPE has no obligation and assumes no liability for the materials, design, specifications, installation, safety, and compatibility of any such third-party racks with any rail kits, including HPE rail kits
- CTO servers do not ship with rail kits, they need to be ordered separately
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

HPE ProLiant DL300 Gen10 Plus 1U SFF Easy Install Rail Kit

P26485-B21

HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit

P26489-B21

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD RAID 1 USB Boot Drive

P21868-B21

Notes:

- In vSphere 7.0, VMware made changes that impact the use of an SD Card/USB media as a standalone boot device and will be removing support for them after version 7.x.
- SD Card/USB media can still be used as a standalone boot option through all 7.x releases via published Customer Advisory [Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).
- For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

HPE Support Services

Tech Care

HPE 3 Year Tech Care Essential Proliant DL325 Gen10 Plus V2 Service

HY5E3E

HPE 3 Year Tech Care Essential wDMR Proliant DL325 Gen10 Plus V2 Service

HY5E4E

HPE 5 Year Tech Care Essential Proliant DL325 Gen10 Plus V2 Service

HY5G7E


HPE 5 Year Tech Care Essential wDMR Proliant DL325 Gen10 Plus V2 Service

HY5G8E

Notes: For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.



Memory

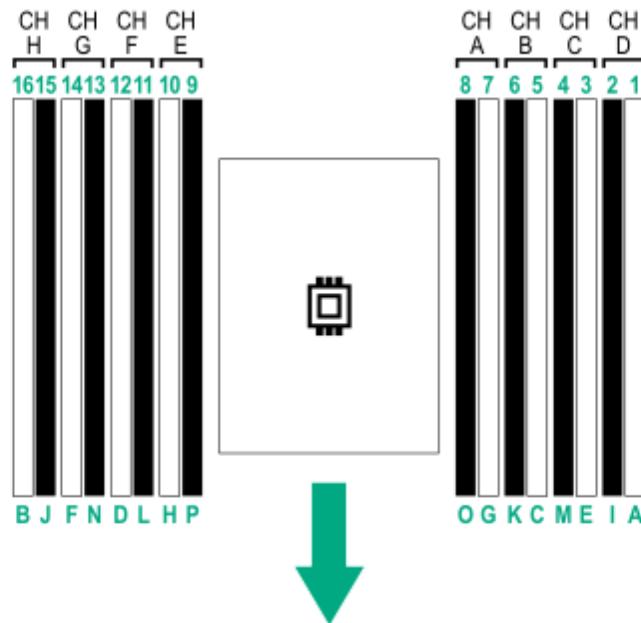


General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/amd-population-rules-Gen10Plus>
- To realize the performance memory capabilities listed in this document, HPE DDR4 Smart Memory is required. For additional information, please see the: [HPE DDR4 Smart Memory QuickSpecs](#)
- For details on the HPE Server Memory speed, visit: <http://www.hpe.com/docs/amd-speed-table-Gen10Plus>



Storage

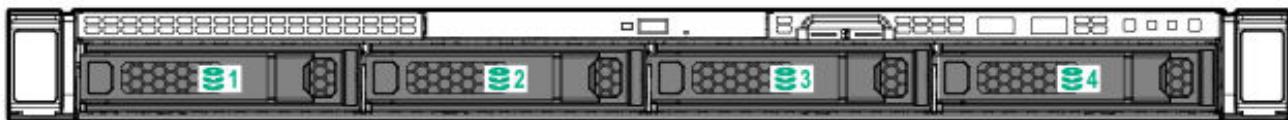

4LFF drives



8SFF + Optional 2SFF (SAS/SATA or NVMe) Shown



Technical Specifications

System Unit

- **Dimensions**

4.29 X 43.46 X 64.43 cm (1.69 X 17.11 X 25.37 in)

- **Weight** (approximate)

- **Minimum** 8 SFF chassis with 8 HDD blanks, 1x processor including standard heatsink, 2x DIMMs, 1x power supply (plus blank), 1x Smart Array, 1x Riser installed, cables for the above

12.19 kg

26.86 lb

- **Maximum** 10 SFF chassis with 10 SFF hard drives, 1x processors including standard heatsink, 16x DIMMs, 2x power supplies, 1x Smart Array, 2x Risers installed, cables for the above

16.19 kg

35.68 lb

Input Requirements (per power supply)

Rated Line Voltage

- 100 to 120 VAC
- 200 to 240 VAC

BTU Rating

Maximum

- For 1600W Power Supply: 5918 BTU/hr (at 200 VAC), 5884 BTU/hr (at 240 VAC) for China
- For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only
- For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

Power Supply Output (per power supply)

- **Rated Steady-State Power**

- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VAC)
 - For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only
 - For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only

- **Maximum Peak Power**

- For 1600W Power Supply: 1600W (at 200 to 240 VAC), 1600W (at 240 VAC) input for China only
 - For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 VAC), 800W (at 240 VAC) input for China only
 - For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only



Technical Specifications

System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:<http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity (non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Emissions Classification (EMC) – Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)



Technical Specifications

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Acoustic Noise

Listed are the declared A-Weighted sound power levels (L_{WAd}) and declared average bystander position A-Weighted sound pressure levels (L_{pAm}) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Idle	
LWAd	5.7 B Entry 5.7 B Base 5.8 B Perf
LpAm	40 dBA Entry 40 dBA Base 40 dBA Perf
Operating	
LWAd	6.3 B Entry 6.3 B Base 6.3 B Perf
LpAm	47 dBA Entry 47 dBA Base 47 dBA Perf

Notes:

- Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.
- Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.
- The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.





Summary of Changes

Date	Version History	Action	Description of Change
01-Jul-2024	Version 28	Changed	Configuration Information and Core Options sections were updated.
03-Jun-2024	Version 27	Changed	Pre-Configured Models and Core Options sections were updated.
15-Apr-2024	Version 26	Changed	Pre-Configured Models section was updated.
01-Apr-2024	Version 25	Changed	Standard Features and Core Options sections were updated.
04-Mar-2024	Version 24	Changed	Standard Features, Pre-Configured Models, Configuration Information, Core Options, Additional Options and Memory sections were updated.
06-Nov-2023	Version 23	Changed	Standard Features, Service and Support, Configuration Information, and Core Options sections were updated
02-Oct-2023	Version 22	Changed	Overview, Standard Features, Service and Support, Pre-Configured Models, Configuration Information, Core Options, and Additional Options sections were updated.
11-Sep-2023	Version 21	Changed	Standard Features, Configuration Information, Core Options, and Additional Options sections were updated.
05-Jun-2023	Version 20	Changed	Configuration Information and Core Options sections were updated.
01-May-2023	Version 19	Changed	Optional Features and Additional Options sections were updated.
10-Jan-2023	Version 18	Changed	Core Options and Additional Options sections were updated. Obsolete SKUs were removed.
05-Dec-2022	Version 17	Changed	Core Options section was updated.
07-Nov-2022	Version 16	Changed	Optional Features, Configuration Information and Core Options sections were updated. Obsolete SKUs were removed.
06-Sep-2022	Version 15	Changed	Core Options section was updated. Obsolete SKUs were removed.
01-Aug-2022	Version 14	Changed	Standard Features and Core Options sections were updated. Obsolete SKUs were removed.
05-Jul-2022	Version 13	Changed	Standard Features, Core Options and Additional Options sections were updated. Obsolete SKUs were removed.
27-Jun-2022	Version 12	Changed	Standard Features, Core Options and Additional Options sections were updated.
23-May-2022	Version 11	Changed	Standard Features, Pre-configured Models, Configuration Information, Core Options and Additional Options sections were updated. Obsolete SKUs were removed.
21-Mar-2022	Version 10	Changed	Pre-configured Models section was updated.
13-Dec-2021	Version 9	Changed	Core Options section was updated.
06-Dec-2021	Version 8	Changed	Core Options and Additional Options sections were updated. Obsolete SKUs were removed.
01-Nov-2021	Version 7	Changed	Standard Features, Additional Options and Core Options sections were updated.
07-Sep-2021	Version 6	Changed	Core Options section was updated. Obsolete SKUs were removed.
02-Aug-2021	Version 5	Changed	Configuration Information and Core Options sections were updated.
06-Jul-2021	Version 4	Changed	Standard Features, Configuration Information, Core Options and Technical Specifications sections were updated. Obsolete SKU was removed.
07-Jun-2021	Version 3	Changed	Standard Features, Pre-configured Models, Configuration Information and Core Options sections were updated.
10-May-2021	Version 2	Changed	Core Options section was updated.
19-Apr-2021	Version 1	New	New QuickSpecs.



Copyright

Make the right purchase decision.
Contact our presales specialists.



© Copyright 2024 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

AMD® and EPYC® are registered trademarks of Advanced Micro Devices Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a50002564enw - 16719 - Worldwide - V28 - 01-July-2024

 **Hewlett Packard Enterprise**