




# ConnectX<sup>®</sup>-4 Lx EN Card

## MCX4121A-ACAT

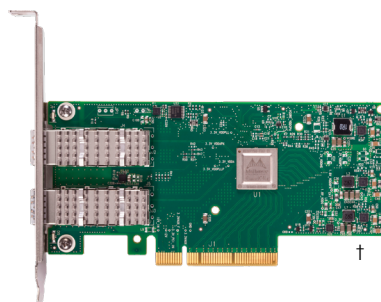

## 25 Gigabit Ethernet Adapter Cards supporting RDMA, Overlay Networks Encapsulation/Decapsulation and more

ConnectX-4 Lx EN Network Controller with 10/25 Gb/s Ethernet connectivity addresses virtualized infrastructure challenges, delivering best-in-class and highest performance to various demanding markets and applications. Providing true hardware-based I/O isolation with unmatched scalability and efficiency, achieving the most cost-effective and flexible solution for Web 2.0, Cloud, data analytics, database, and storage platforms.

With the exponential increase in usage of data and the creation of new applications, the demand for the highest throughput, lowest latency, virtualization and sophisticated data acceleration engines continues to rise. ConnectX-4 Lx EN enables data centers to leverage the world's leading interconnect adapter for increasing their operational efficiency, improving servers' utilization, maximizing applications productivity, while reducing total cost of ownership (TCO).

ConnectX-4 Lx EN provides an unmatched combination of 10/25Gb/s bandwidth, sub-microsecond latency and a 75 million packets per second message rate. It includes native hardware support for RDMA over Converged Ethernet, Ethernet stateless offload engines, Overlay Networks, and GPUDirect<sup>®</sup> Technology.

### High Speed Ethernet Adapter

ConnectX-4 Lx offers the best cost effective Ethernet adapter solution for 10/25 Ethernet speeds, enabling seamless networking, clustering, or storage. The adapter reduces application runtime, and offers the flexibility and scalability to make infrastructure run as efficiently and productively as possible.

### I/O Virtualization

ConnectX-4 Lx EN SR-IOV technology provides dedicated adapter resources and guaranteed isolation and protection for virtual machines (VMs) within the server. I/O virtualization with ConnectX-4 Lx EN gives data center administrators better server utilization while reducing cost, power, and cable complexity, allowing more Virtual Machines and more tenants on the same hardware.

### Overlay Networks

In order to better scale their networks, data center operators often create overlay networks that carry traffic from individual virtual machines over logical tunnels in encapsulated formats such as NVGRE and VXLAN. While this solves network scalability issues, it hides the TCP packet from the hardware offloading engines, placing higher loads on the host CPU. ConnectX-4 Lx EN effectively addresses this by providing advanced NVGRE, VXLAN and GENEVE hardware offloading engines that encapsulate and de-capsulate the overlay protocol headers, enabling the traditional offloads to be performed on the encapsulated traffic for these and other tunneling protocols (GENEVE, MPLS, QinQ, and so on). With ConnectX-4 Lx EN, data center operators can achieve native performance in the new network architecture.

## HIGHLIGHTS

### NEW FEATURES

- 10/25Gb/s Ethernet speeds
- Single and dual-port options available
- Erasure Coding offload
- Virtualization
- Low latency RDMA over Converged Ethernet (RoCE)
- CPU offloading of transport operations
- Application offloading
- Mellanox PeerDirect<sup>™</sup> communication acceleration
- Hardware offloads for NVGRE, VXLAN and GENEVE encapsulated traffic
- End-to-end QoS and congestion control
- Hardware-based I/O virtualization
- RoHS compliant
- ODCC compatible

### BENEFITS

- Highest performing boards for applications requiring high bandwidth, low latency and high message rate
- Industry leading throughput and latency for Web 2.0, Cloud and Big Data applications
- Smart interconnect for x86, Power, Arm, and GPU-based compute and storage platforms
- Cutting-edge performance in virtualized overlay networks
- Efficient I/O consolidation, lowering data center costs and complexity
- Virtualization acceleration
- Power efficiency

## RDMA over Converged Ethernet (RoCE)

ConnectX-4 Lx EN supports RoCE specifications delivering low-latency and high-performance over Ethernet networks. Leveraging data center bridging (DCB) capabilities as well as ConnectX-4 Lx EN advanced congestion control hardware mechanisms, RoCE provides efficient low-latency RDMA services over Layer 2 and Layer 3 networks.

## Mellanox PeerDirect™

PeerDirect™ communication provides high efficiency RDMA access by eliminating unnecessary internal data copies between components on the PCIe bus (for example, from GPU to CPU), and therefore significantly reduces application run time. ConnectX-4 Lx EN advanced acceleration technology enables higher cluster efficiency and scalability to tens of thousands of nodes.

## Storage Acceleration

Storage applications will see improved performance with the higher bandwidth ConnectX-4 Lx EN delivers. Moreover, standard block and file access protocols can leverage RoCE for high-performance storage access. A consolidated compute and storage network achieves significant cost-performance advantages over multi-fabric networks.

## Distributed RAID

ConnectX-4 Lx EN delivers advanced Erasure Coding offloading capability, enabling distributed Redundant Array of Inexpensive Disks (RAID), a data storage technology that combines multiple disk drive components into a logical unit for the purposes of data redundancy and performance improvement. ConnectX-4 Lx EN's Reed-Solomon capability introduces redundant block calculations, which, together with RDMA, achieves high performance and reliable storage access.

## Host Management

Mellanox host management and control capabilities include NC-SI over MCTP over SMBus, and MCTP over PCIe - Baseboard Management Controller (BMC) interface, as well as PLDM for Monitor and Control DSP0248 and PLDM for Firmware Update DSP0267.

## Software Support

All Mellanox adapter cards are supported by Windows, Linux distributions, VMware, FreeBSD, and Citrix XENServer. ConnectX-4 Lx EN supports various management interfaces and has a rich set of tools for configuration and management across operating systems.

## Compatibility

### PCI Express Interface

- PCIe Gen 3.0 compliant, 1.1 and 2.0 compatible
- 2.5, 5.0, or 8.0GT/s link rate x8
- Auto-negotiates to x8, x4, x2, or x1
- Support for MSI/MSI-X mechanisms

### Operating Systems/Distributions\*

- RHEL/CentOS
- Windows
- FreeBSD
- VMware
- OpenFabrics Enterprise Distribution (OFED)
- OpenFabrics Windows Distribution (WinOF-2)

### Connectivity

- Interoperable with 10/25Gb Ethernet switches
- Passive copper cable with ESD protection
- Powered connectors for optical and active cable support

### Tested Modules & Cables

- Cisco Optical Module SFP-25G-SR-S
  - Cisco Optical Module SFP-10G-SR
  - Cisco Optical Module SFP-10G-LR
- Mellanox recommends Mellanox cables & modules. For additional information on tested modules, go to: [http://www.mellanox.com/page/firmware\\_table\\_ConnectX4LxEN](http://www.mellanox.com/page/firmware_table_ConnectX4LxEN)
- a. Select OPN MCX4121A-ACAT
  - b. Select PSID
  - c. Select "Release Notes" under Download/Documentation

## FEATURES\*

### Ethernet

- 25GbE / 10GbE
- 25G Ethernet Consortium 25 Gigabit Ethernet
- IEEE 802.3ae 10 Gigabit Ethernet
- IEEE 802.3az Energy Efficient Ethernet
- IEEE 802.3ap based auto-negotiation and KR startup
- Proprietary Ethernet protocols (20/40GBASE-R2, 50GBASE-R4)
- IEEE 802.3ad, 802.1AX Link Aggregation
- IEEE 802.1Q, 802.1P VLAN tags and priority
- IEEE 802.1Qaz (ETS)
- IEEE 802.1Qbb (PFC)
- IEEE 802.1Qbg
- IEEE 1588v2
- Jumbo frame support (9.6KB)

### Enhanced Features

- Hardware-based reliable transport
- Collective operations offloads
- Vector collective operations offloads
- PeerDirect RDMA (aka GPUDirect® communication acceleration
- 64/66 encoding
- Extended Reliable Connected transport (XRC)
- Dynamically Connected transport (DCT)
- Enhanced Atomic operations
- Advanced memory mapping support, allowing user mode registration and remapping of memory (UMR)
- On demand paging (ODP) – registration free RDMA memory access

### CPU Offloads

- RDMA over Converged Ethernet (RoCE)
- TCP/UDP/IP stateless offload
- LSO, LRO, checksum offload
- RSS (can be done on encapsulated packet), TSS, VLAN insertion/stripping, Receive flow steering
- Intelligent interrupt coalescence

### Storage Offloads

- RAID offload - erasure coding (Reed-Solomon) offload

### Overlay Networks

- Stateless offloads for overlay networks and tunneling protocols
- Hardware offload of encapsulation and decapsulation of NVGRE and VXLAN overlay networks

### Hardware-Based I/O Virtualization

- Single Root IOV
- Multi-function per port
- Address translation and protection
- Multiple queues per virtual machine
- Enhanced QoS for vNICs
- VMware NetQueue support

### Virtualization

- SR-IOV: Up to 256 Virtual Functions
- SR-IOV: Up to 16 Physical Functions per port
- Virtualization hierarchies (e.g. NPAR)
  - Virtualizing Physical Functions on a physical port
  - SR-IOV on every Physical Function
- 1K ingress and egress QoS levels
- Guaranteed QoS for VMs

### Protocol Support

- OpenMPI, IBM PE, OSU MPI (MVAPICH/2), Intel MPI
- Platform MPI, UPC, Open SHMEM
- TCP/UDP, MPLS, VxLAN, NVGRE, GENEVE
- iSER, NFS RDMA, SMB Direct
- uDAPL

### Management and Control Interfaces

- NC-SI over MCTP over SMBus and NC-SI over MCTP over PCIe - Baseboard Management Controller interface
- SDN management interface for managing the eSwitch
- I²C interface for device control and configuration
- General Purpose I/O pins
- SPI interface to Flash
- JTAG IEEE 1149.1 and IEEE 1149.6

### Remote Boot

- Remote boot over Ethernet
- Remote boot over iSCSI
- PXE and UEFI

\* This section describes hardware features and capabilities. Please refer to the driver and firmware release notes for feature availability.

Table 1 - Environment Specifications for ConnectX-4 Lx EN Adapter Card MCX4121A-ACAT

| Temperature                               |
|-------------------------------------------|
| Operating: 0°C to 55°C (32°F to 131°F)    |
| Storage: – 40°C to 70°C (– 40°F to 158°F) |

Table 2 - Airflow Specifications (LFM) for ConnectX-4 Lx EN Adapter Card MCX4121A-ACAT

| Airflow Direction             | Heatsink to Port |                   | Port to Heatsink |                   |
|-------------------------------|------------------|-------------------|------------------|-------------------|
| Mellanox OPN                  | Passive cable    | Active cable 1.5W | Passive cable    | Active cable 1.5W |
| ConnectX-4 Lx - MCX4121A-ACAT | 250 LFM at 55°C  | 400 LFM at 55°C   | 250 LFM at 55°C  | 250 LFM at 55°C   |

Table 3 - Ordering Information

| Cisco Product ID                            | Description                                                                                                                 | Qualified Cisco Servers                                                                         |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| a. UCSC-P-M4D25GF and<br>b. UCSC-P-M4D25GF= | Ships in a bulk-packed box with a standard-height bracket installed.<br>Ships without SFP28 optical transceivers installed. | Cisco UCS C220 M5 Rack Server<br>Cisco UCS C240 M5 Rack Server<br>Cisco UCS C480 M5 Rack Server |